


# LEDP64SB - Operation Manual

## Specification:

1. Weight: 2.3kg
2. Size: 30×22×23cm
3. Power input: AC 120V, 60Hz
4. Watts - 30W
5. LEDs: 183PCS RGB 61 red, 61 green, 61 blue
6. 3PIN female XLR socket and 3PIN male XLR socket
7. Built-in microphone



## Function Description:

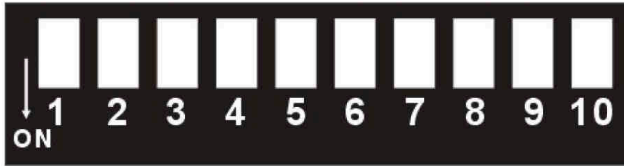

Mode	Dip10 dip9	dip8 dip7 dip6 dip5 dip4 dip3 dip2 dip1	Function
Auto Run	0 0	X X 0 0 0 0 0 0	Colour changing and colour fading Select running speed via dip7, dip 8
		0 0 X X X X X X	Static colour and flash select static colour via dip1~dip3 (separately for R.G.B) select flash speed via Dip4~dip6
Sound activated	0 1	X X X X X X X X	Change colour via sound activated
DMX	1 X	X X X X X X X X	DMX mode CH1→Dim CH2 →R CH3→G CH4→B
Other	1 0	0 0 0 0 0 0 0 1	DMX address is 1 when in DMX mode Slave when in Auto Run/sound activated
	1 0	0 0 0 0 0 0 0 0	Black out

Channel	Value	Function
CH 1 - Dimmer	000 – 189	0 – 100%
	190 – 250	Strobe
	251 - 255	No Function
CH 2 - RED	000 - 255	0 – 100% Intensity
CH 3 - GREEN	000 - 255	0 – 100% Intensity
CH 3 - BLUE	000 - 255	0 – 100% Intensity

